

# On-Premises Roller Ironer


## I25-100, I25-120, I25-140

### Features

- Attractive design
- Standard finger guard protection
- When unattended, the device shuts off automatically
- Reduced number of mechanical and moving parts for a lower maintenance cost
- Homogeneous ironing pressure to ensure top ironing quality
- PID controlled temperature regulation offering better temperature distribution and reduced energy consumption
- Long-life heating elements
- Anodised extruded aluminium profile avoiding temperature drop and ensuring top ironing quality
- All vital components are easily accessible
- Start/stop pedal
- Backside of the basin is insulated with 25 mm ceramic wool
  - no energy waste
  - quick temperature rise

### Options

- Frequency inverter enabling variable ironing speed

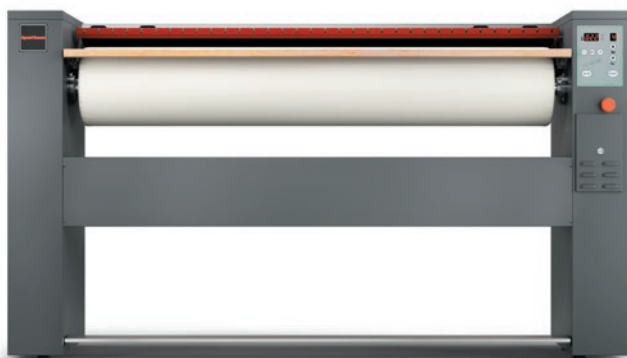

Control panel



Easy Operation



One Operator Only



Compact Design



Global Ironing Solution

# On-Premises Roller Ironer

## Specifications

	I25-100	I25-100V*	I25-120	I25-120V*	I25-140	I25-140V*	I25-140AV**
ROLLER DIMENSIONS							
Length [mm]	1000	1000	1200	1200	1400	1400	1400
Diameter [mm]	250	250	250	250	250	250	250
Capacity [kg/h]	30	30	35	35	40	40	40
Relative Humidity [%]	10 – 15	10 – 15	10 – 15	10 – 15	10 – 15	10 – 15	20 – 25
Type of Heating	Electric	Electric	Electric	Electric	Electric	Electric	Electric
Speed [m/min]	3,9	2 – 4	3,9	2 – 4	3,9	2 – 4	2 – 4
CONNECTION							
Voltage/Hz/ Phase Circuit Breaker [V/Hz/Phase]	230V/50Hz/1ph 230V/50Hz/3ph 230V/60Hz/1ph 230V/60Hz/3ph 400V/50Hz/3ph 400V/60Hz/3ph 480V/60Hz/3ph	230V/50Hz/1ph 230V/50Hz/3ph 230V/60Hz/1ph 230V/60Hz/3ph 400V/50Hz/3ph 400V/60Hz/3ph 480V/60Hz/3ph	230V/50Hz/1ph 230V/50Hz/3ph 230V/60Hz/1ph 230V/60Hz/3ph 400V/50Hz/3ph 400V/60Hz/3ph 480V/60Hz/3ph	230V/50Hz/1ph 230V/50Hz/3ph 230V/60Hz/1ph 230V/60Hz/3ph 400V/50Hz/3ph 400V/60Hz/3ph 480V/60Hz/3ph	230V/50Hz/1ph 230V/50Hz/3ph 230V/60Hz/1ph 230V/60Hz/3ph 400V/50Hz/3ph 400V/60Hz/3ph 480V/60Hz/3ph	230V/50Hz/1ph 230V/50Hz/3ph 230V/60Hz/1ph 230V/60Hz/3ph 400V/50Hz/3ph 400V/60Hz/3ph 480V/60Hz/3ph	230V/50Hz/1ph 230V/50Hz/3ph 230V/60Hz/1ph 230V/60Hz/3ph 400V/50Hz/3ph 400V/60Hz/3ph 480V/60Hz/3ph
Heating Power [kW]	5	5	6	6	7	7	8,4
Motor Rated Input [kW]	0,18	0,18	0,18	0,18	0,18	0,18	0,215
Total Electric Supply [kW]	5,18	5,18	6,18	6,18	7,18	7,18	8,615
Exhaust Diameter [mm]	n/a	n/a	n/a	n/a	n/a	n/a	55
DIMENSIONS							
Height [mm]	1005	1005	1005	1005	1005	1005	1005
Width [mm]	1400	1400	1600	1600	1800	1800	1800
Depth [mm]	420	420	420	420	420	420	420
TRANSPORT DATA							
Height [mm]	1150	1150	1150	1150	1150	1150	1150
Width [mm]	1480	1480	1680	1680	1880	1880	1880
Depth [mm]	500	500	500	500	500	500	500
Net Weight [kg]	110	110	118	118	135	135	135
Gross Weight [kg]	119	119	130	130	154	154	154

\*Option V = Variable Speed & Adjustable Temperature


\*\*Option AV = Variable Speed, Adjustable Temperature, & Suction Fan

# On-Premises Roller Ironer

## Dimensions

	Height	Width	Depth
I25-100	1005	1400	420
I25-120	1005	1600	420
I25-140	1005	1800	420

All measurements are in mm.

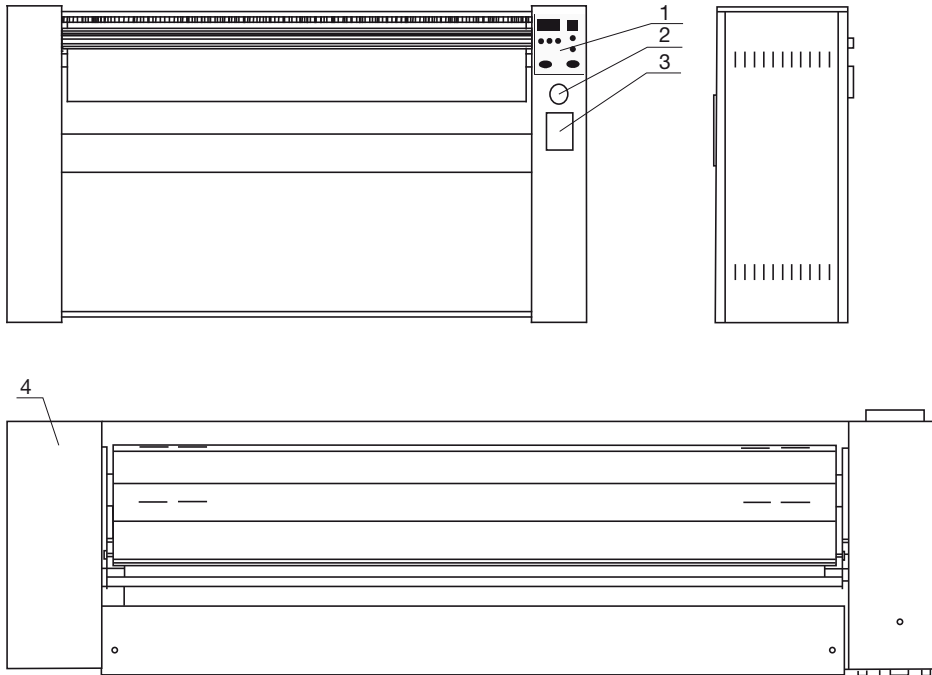

- 1 Control panel
- 2 Emergency stop button
- 3 Manual roller drive
- 4 Main switch and power supply